

P44WG-xxxxE/Z4:1LF



PM7W-SERIES

Rev.11-2008

- ✓ 12 Watt
- ✓ 4:1 Ultra Wide Input
- ✓ 2" x 1" Case
- ✓ 1.5 kV DC I/O Isolation
- ✓ Regulated Output
- ✓ Single and Dual Output
- ✓ Continuous Short Circuit Prot.

The PM7W series P44WG-xxxxE/Z4:1LF is a family of cost effective 12 W, single & dual output DC-DC converters with a ultra wide input range of 4:1. These converters are encapsulated in nickel coated brass 2"x1" case with high performance features: 1500VDC input/output isolation voltage, continuous short circuit protection with automatic restart and tight line / load regulation, high efficiency operation and output voltage accuracy of $\pm 1\%$ maximum.

All specifications typical at $T_a=25^\circ\text{C}$, nominal input voltage and full load unless otherwise specified

Input Specifications

Voltage Range	4:1 Ultra Wide Input (See Table)
Input Filter	PI Type
Input Reflected Ripple Current ¹	35 mA pk-pk
Start up Time (Nom. V_{in} and constant resistive load)	20mS, typ.

Output Specifications

Voltage Accuracy	$\pm 1\%$
Short Circuit Protection	Indefinite (Automatic Recovery)
Over Current Protection	140% of max. I_{out}
Line Regulation	$\pm 0.5\%$
Load Regulation (10% - 100%)	$\pm 0.5\%$ (10% - 100% load) $\pm 1.0\%$ (< 10% load)
Cross Regulation ³	$\pm 5\%$
Ripple and Noise (20Mhz bandwidth)	75 mV pk-pk
Temperature Coefficient	$\pm 0.02\% / ^\circ\text{C}$

General Specifications

Efficiency	See Table
I/O Isolation Voltage (3 sec.)	1500 VDC
I/O Isolation Capacitance	1200 pF, typ.
I/O Isolation Resistance	1000 M Ohm
Switching Frequency	300 kHz, typ.
Humidity	95% rel H
Reliability Calculated MTBF (MIL-HDBK-217F)	> 1.121 Mhrs

Physical Specifications

Case Material	Nickel Coated Brass
Potting Material	Epoxy (UL94V-0 rated)
Weight	~ 30g, typ.

Environment Specifications

Operating Temperature	-40 to +71 $^\circ\text{C}$ (ambient)
Maximum Case Temperature	100 $^\circ\text{C}$
Storage Temperature	-40 to +125 $^\circ\text{C}$
Cooling	Free Air Convection
RoHS Conform	Soldering 260 $^\circ\text{C}$, max. (1.5mm from case 10s.)

Selection Guide

Single and Dual Output



Order #	Input Voltage (VDC)	Input Current No Load (mA)	Input Current Full Load (mA)	Output Voltage (VDC)	Output Current Min. Load (mA)	Output Current Full Load (mA)	Efficiency (%)	Capacitor Load (uF) ²
SINGLE OUTPUT								
P44WG-243R3E4:1LF	9-36	25	412	3.3	0	2400	80	3300
P44WG-2405E4:1LF	9-36	25	609	5	0	2400	82	3300
P44WG-247R2E4:1LF	9-36	25	602	7.2	0	1666	83	1000
P44WG-2409E4:1LF	9-36	25	602	9	0	1333	83	680
P44WG-2412E4:1LF	9-36	25	588	12	0	1000	85	680
P44WG-2415E4:1LF	9-36	25	588	15	0	800	85	470
P44WG-483R3E4:1LF	18-72	20	206	3.3	0	2400	80	3300
P44WG-4805E4:1LF	18-72	20	304	5	0	2400	82	3300
P44WG-487R2E4:1LF	18-72	20	301	7.2	0	1666	83	1000
P44WG-4809E4:1LF	18-72	20	301	9	0	1333	83	680
P44WG-4812E4:1LF	18-72	20	294	12	0	1000	85	680
P44WG-4815E4:1LF	18-72	20	294	15	0	800	85	470

DUAL OUTPUT								
P44WG-2405Z4:1LF	9-36	25	609	± 5	0	± 1200	82	± 2200
P44WG-247R2Z4:1LF	9-36	25	602	± 7.2	0	± 833	83	± 470
P44WG-2409Z4:1LF	9-36	25	602	± 9	0	± 666	83	± 470
P44WG-2412Z4:1LF	9-36	25	588	± 12	0	± 500	85	± 470
P44WG-2415Z4:1LF	9-36	25	588	± 15	0	± 400	85	± 330
P44WG-4805Z4:1LF	18-72	20	304	± 5	0	± 1200	82	± 2200
P44WG-487R2Z4:1LF	18-72	20	301	± 7.2	0	± 833	83	± 470
P44WG-4809Z4:1LF	18-72	20	301	± 9	0	± 666	83	± 470
P44WG-4812Z4:1LF	18-72	20	294	± 12	0	± 500	85	± 470
P44WG-4815Z4:1LF	18-72	20	294	± 15	0	± 400	85	± 330

If you need other specifications, please enquire.

Notes:


Package / Pinning / Derating

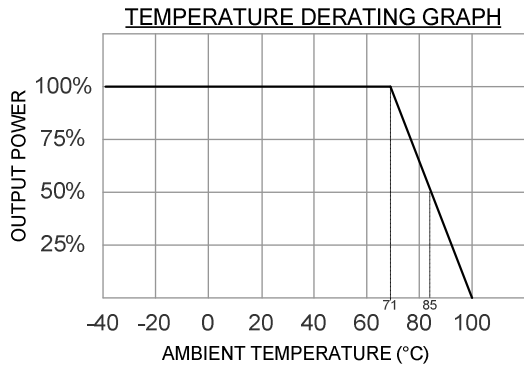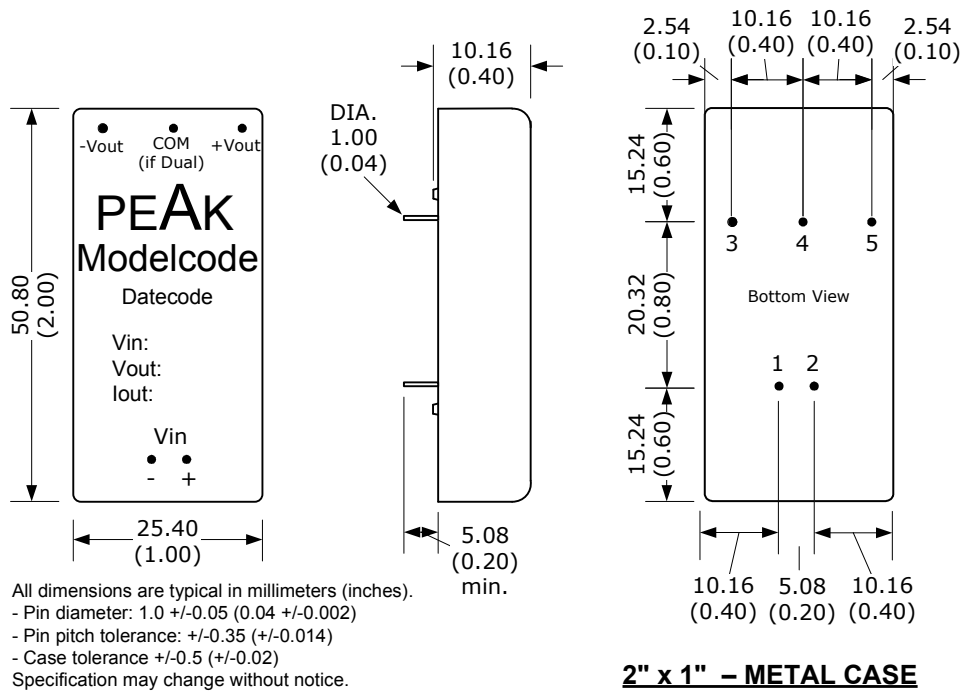

PIN CONNECTIONS		
#	SINGLE	DUAL
1	+Vin	+Vin
2	- Vin	- Vin
3	+Vout	+Vout
4	Omitted	Common
5	- Vout	- Vout

App Notes:

- ¹ = Measured Input reflected ripple current with a simulated source inductance of 12uH.
- ² = Tested by minimal Vin and constant resistive load.
- ³ = One load is 25% to 100% load, the other load is 100% load, the output voltage variable rate is within ±5%.
- ⁴ = Input filter components (C1, C2, L) are used to help meet conducted emissions requirement for the module. These components should be mounted as close as possible to the module. All leads should be minimized to decrease radiated noise.

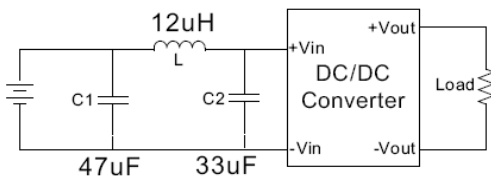

EMC SPECIFICATIONS		
Radiated Emissions	EN 55022	CLASS A
Conducted Emissions	EN 55022	CLASS A
ESD	IEC 61000-4-2	Perf. Criteria B
RS	IEC 61000-4-3	Perf. Criteria A
EFT	IEC 61000-4-4	Perf. Criteria B
CS	IEC 61000-4-6	Perf. Criteria A
PfMF	IEC 61000-4-8	Perf. Criteria A